


安装套件



可用于至少有 3 个支架的系统

- 铝合金
- 综合误差 $\leq \pm 0.02\%$ (0.017% C4; 0.014% C5)
- IP65防护等级

量程	kg	C3	精度等级 C4	C5			秤台(mm)	净重(kg)
60		•	•	—	•	•	400 x 400	0.6
100		•	•	—	•	•	400 x 400	0.6
150		•	•	—	•	•	400 x 400	0.6
200		•	•	—	•	•	400 x 400	0.6
300		•	•	•	•	•	400 x 400	0.6

根据要求

认证



OIML R60 C3



符合欧亚关税同盟的规定



相当于英国的CE标志



符合英国有关合法贸易用途的规定

根据要求提供认证

校准报告



ATEX II 1G 2D (zone 0-1-2-21-22) (CE-UK)



IECEx (zone 0-1-2-20-21-22)



OIML R60 C4/C5



符合欧亚关税同盟关于在潜在爆炸性环境中使用的规定



符合中国市场关于在潜在爆炸性环境中使用的规定






NTEP-符合美国有关合法贸易用途的规定

配套附件

说明	编码
 不锈钢和橡胶防水套件	IP68AM
 镀锌钢拉伸块	BLOCT8Z

尺寸(mm)

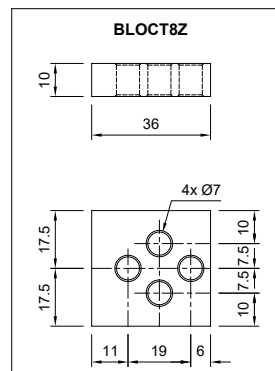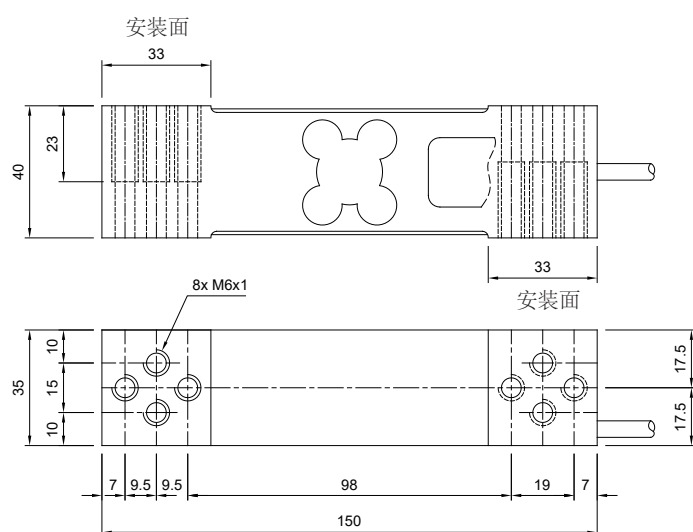

对于称重传感器的固定螺丝，请按照表中所示的扭矩进行拧紧

螺钉	M6	
螺钉类	6.8	8.8
拧紧扭矩	7.5 Nm	10 Nm

技术特点

材质		铝合金		
OIML R60精度等级-检定分度数		C3 • 3000	C4 • 4000	C5 • 5000
额定负载 (E max)		60 - 100 - 150 - 200 - 300 kg		300 kg
最小检定分度值V min)		E max / 10000	E max / 15000	E max / 20000
综合误差		≤±0.02%	≤±0.017%	≤±0.014%
防护等级		IP65		
额定输出	2 mV/V ±10%	输入电阻	406 Ω ±6	
温度对零点的影响	0.003% °C	输出电阻	350 Ω ±3	
温度对量程的影响	0.002% °C	零点平衡	≤±2%	
补偿温度范围	-10 °C / +40 °C	绝缘阻抗	≥5000 MΩ	
工作温度范围	-35 °C / +65 °C	安全过载 (满量程的百分比)	150%	
蠕变误差 (30mins)	0.025%	极限过载 (满量程的百分比)	300%	
最大允许电压	18 V	额定载荷下的偏移	0.5 mm	

电气连接

电缆长度	3 m
电缆直径	5 mm
芯线	4 x 0.20 mm ²

屏蔽层	
+信号	绿
+激活	红
-信号	白
-激活	黑

